



# NEXUS PREMOLD

Retread Products & Services

Product Catalogue

A Division of H&H Industries



Phone: (740) 682-7721

Fax: (740) 682-0530

HHINDUSTRIESINC.COM

- ❖ H&H Industries has been pioneering the process of Precure Retreading OTR Tires since its inception. With our own press and precure molds, H&H is the only OTR retread provider capable of using different compounds custom blended for your application.
- ❖ Not only can we offer OTR premolded retreading, but now we can supply precure tread rubber to OTR retread companies nationwide.

**NE X US PREMOLD**  
*BUILT BY RETREADERS FOR RETREADERS*

- ❖ Dimensional data listed in this catalogue is based on common buffing data. Some sizes may need modification to certain parameters for proper tread segment size and fitment. Buffing dimensions may differ due to brand, casing type, ply, TRA code, etc. Tread segment compatibility should be verified based on your buff data and specifications to ensure proper fitment.

**XHA**



Size	Segment Length	Segment Width	Tread Depth	Segments per Tire	Segments per Skid
17.5	39"	15.25"	36/32s	4	48
20.5	43"	18.5"	39/32s	4	40
23.5	45.25"	20.563"	42/32s	4	32
26.5	40.125"	24"	47/32s	5	30
29.5	41.625"	26"	53/32s	5	20


**VMT**



Size	Segment Length	Segment Width	Tread Depth	Segments per Tire	Segments per Skid
20.5	42.875"	18.25"	42/32s	4	40
23.5	46"	20.25"	44/32s	4	32
26.5	40.125"	24"	48/32s	5	30
29.5	42"	25.625"	53/32s	5	20

*\* "Segments per tire" accounts for the number of full segments used. Some casing \* brands/types may require the use of an extra pitch(s).*

**VMTP**

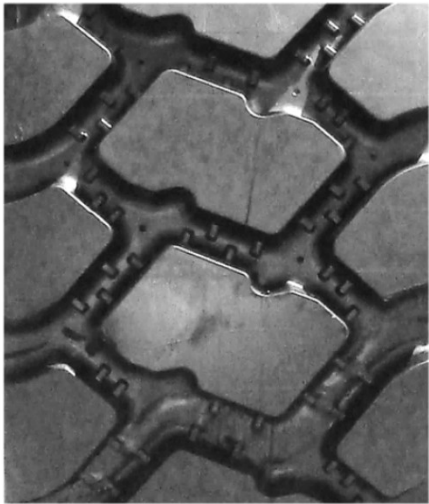

Size	Segment Length	Segment Width	Tread Depth	Segments per Tire	Segments per Skid
18.00	42.125"	17.875"	64/32s	5	20
24.00	39.375"	21.75"	80/32s	6	24


**XDT**



Size	Segment Length	Segment Width	Tread Depth	Segments per Tire	Segments per Skid
18.00	42.125"	18"	64/32s	5	20
24.00	35.25"	22.5"	64/32s	7	24
27.00	30.125"	26.75"	64/32s	10	20

*\* "Segments per tire" accounts for the number of full segments used. Some casing brands/types may require the use of an extra pitch(s).*

**VSNT**

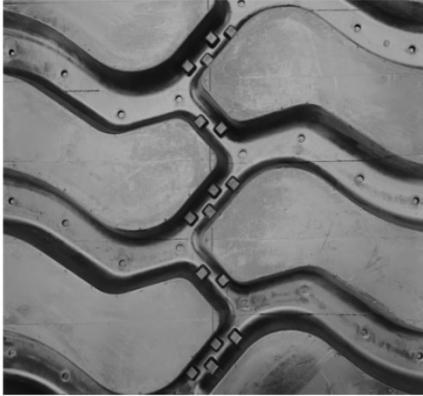

Size	Segment Length	Segment Width	Tread Depth	Segments per Tire	Segments per Skid
20.5	43.25"	19.125"	62/32s	4	24
23.5	37.75"	21.25"	70/32s	5	20
26.5	40.25"	24.813"	70/32s	5	20
29.5	35.688"	27.563"	70/32s	6	24
35/65	28.875"	33"	74/32s	8	16

**XMINE**



Size	Segment Length	Segment Width	Tread Depth	Segments per Tire	Segments per Skid
20.5	43.5	19.125"	64/32s	4	24

*\* "Segments per tire" accounts for the number of full segments used. Some casing brands/types may require the use of an extra pitch(s).*

**VSW**



Size	Segment Length	Segment Width	Tread Depth	Segments per Tire	Segments per Skid
14.00	39.375"	12.75"	35/32s	4	56
17.5	38.875"	15.5"	35/32s	4	48
20.5	42.5"	18.5"	38/32s	4	40
23.5	45.5"	20.563"	40/32s	4	32
26.5	40.75"	24.375"	44/32s	5	30

**XLD**



Size	Segment Length	Segment Width	Tread Depth	Segments per Tire	Segments per Skid
35/65	30.25"	31.5"	64/32s	8	16

*\* "Segments per tire" accounts for the number of full segments used. Some casing brands/types may require the use of an extra pitch(s).*

**VUT**



Size	Segment Length	Segment Width	Tread Depth	Segments per Tire	Segments per Skid
14.00	39.5"	12.75"	32/32s	4	56

**PG**



Size	Segment Length	Segment Width	Tread Depth	Segments per Tire	Segments per Skid
14.00	39.5"	12.75"	32/32s	4	56

*\* "Segments per tire" accounts for the number of full segments used. Some casing brands/types may require the use of an extra pitch(s).*



## Built By Retreaders For Retreaders

